

CAR-GB Swimming Pool Heat Pump-heating/hot water									
CAR-GB		CAR-08	CAR-12	CAR-16	CAR-20	CAR-24	CAR-28	CAR-40	CAR-48
Heating condition	Heating capacity KW	7.8	11.8	15.68	19.6	23.5	30	39.2	47.1
	Input power KW	1.5	2.26	2.96	3.7	4.5	5.4	7.4	9
	Running current A	7.5	9.8/4.1	13.5/5.4	6.7	22/7.3	23/9.6	13.4	14.6
	COP	5.2	5.2	5.3	5.3	5.2	5.5	5.3	5.2
	Max running current A	9.7	17.1/8	24/10	12	.34/18	36/22	24	26
	Outlet water temp °C	20°C to 45°C adjustable							
Power source V/PH/HZ	220V/1N/50Hz	220V-240V/1N/50HZ / 380V-415V/3N/50HZ		380V-415V/3N/50HZ	220V-240V/1N/50HZ / 380V-415V/3N/50HZ		3		
Noise level	<45	<51	<52	<53	<56	<56	<60	<65	
Unit size W x D x H mm	1000*300*620	680*635*830/ 880*370*1000	810*780*1050/90 0*420*1400	810*780*1050/90 0*420*1400	880*780*1000/90 0*420*1400	880*780*1050/14 10*500*1500	1450*780*1050	1450*780*1200	
Wood Packing W x D x H mm	1100*390*790	890*735*1000/98 0*470*1120	970*880*1220/10 00*520*1500	970*880*1220/10 00*520*1500	980*880*1170/10 00*520*1500	980*880*1220/15 10*600*1620	1550*880*1220	1550*880*1420	
Net weight Kg	85	115	125	135	145	155	240	305	
Working ambient temp range °C	-20°C to 43°C								
Water temp control precise °C	±2°C								
Throttle type	Electronic expansion valve/thermostatic expansion valve								
Refrigerant type	R410A	R417A							
Refrigerant qty Kg	1	1.4	1.7	2	2.3	2.5	2.3*2	2.5*2	
Compressor Type	Rotary	Hermetically sealed scroll compressor Copeland							
Compressor qty pc	1	1	1	1	1 or 2	1 or 2	2	2	
Air source side	Heat exchanger type	Efficient finned tube heat exchanger							
	Fan type	Axial flow fan							
	Motor power Kw	0.06	0.1	0.2	0.25	0.3	0.4	0.5	0.6
Water side	Heat exchanger type	High efficient titanium tube heat exchanger							
	Water flow M <sup>3</sup> /H	1.72	2.54	3.4	4.21	5.05	5.89	8.43	10.12
	Water pressure loss kPa	26	26	30	30	32	32	32	34

Hot wa	Pipe size mm	30	40	50	50	50	50	63	63
	Max working pressure kPa	600	600	600	600	600	600	600	600
FOB Guangzhou USD		823	1273	1647	1797	2059	2396	3307	3550
СЕБЕСТОЙНОСТ БГ		2384.85	3262.35	3991.65	4284.15	4795.05	5452.2	7228.65	7702.5
Цена EX WORKS BG PK BGN		3887.3055	5317.6305	6506.3895	6983.1645	7815.9315	8887.086	11782.7	12555.08
ЕСОс панели, БР			8	12	16	20	24	32	40
Цена EX WORKS BG PK BGN			8197.6305	10826.39	12743.165	15015.932	17527.086	23302.7	26955.08

Test conditions: air source side DB/WB 24°C/19°C, hot water side initial water temp 28°C, ending water temp 32°C.

#### Product options:

1. Stainless steel casing
2. Soft starter apparatus
3. Bottom heater

If need to add above functions, pls contact us, it need to add cost.



CAR-08



CAR-12/16/20/24/28



CA

#### Terms and conditions:


1. Brand: CliTech; Price for powder coated casing only (stainless steel casing/powder coated casing); CAR-24/28 for single compressor type only.
2. The quotation valid 30 days; based on order qty 10 sets.
3. Price term: FOB Guangzhou China

4 .Payment term: 30% by T/T as production deposit and balanced 70% before shipment.

5 .Delivery time: Around 10--20 days after receiving the production deposit and confirmation on all the printed materials.

6 .The prices must be adjusted when the prices of raw materials or RMB value against USD increase more than 3%.

---

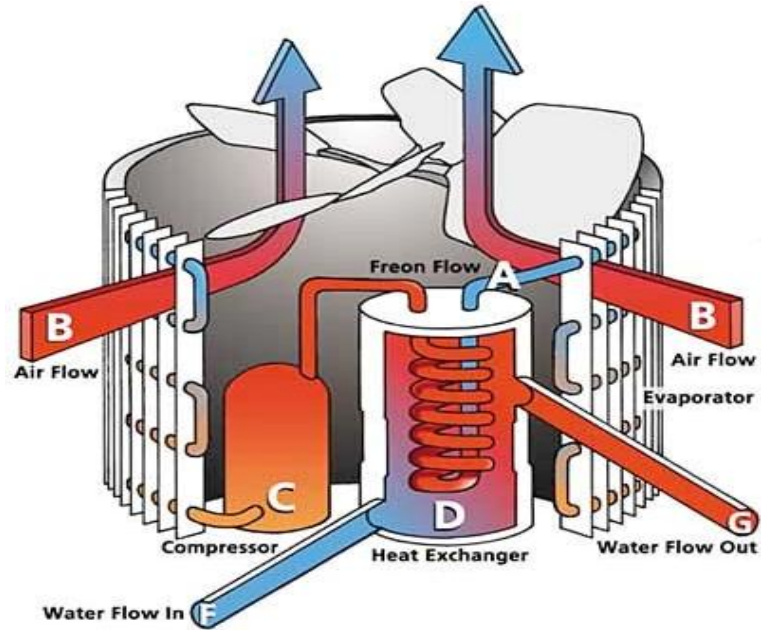

CAR-60	CAR-80	CAR-100
58.8	78.4	94.2
11	15.1	18.5
20.1	26.8	29.2
5.3	5.2	5.1
36	48	52

80V-415V/3N/50HZ

<66	<68	<68
1700*900*1250	1700*900*1250	1700*900*1250
1800*1000*1420	1800*1000*1420	1800*1000*1420
480	610	720

2.3*3	2.3*4	2.5*4
3	4	4

0.9	1.5	1.5
-----	-----	-----

12.64	16.85	20.25
38	38	38

75	75	75
600	600	600
4352	6468	7385
9266.4	13392.6	15180.75
<b>15104.23</b>	<b>21829.938</b>	<b>24744.623</b>
<b>50</b>	<b>60</b>	<b>80</b>
<b>33104.23</b>	<b>43429.938</b>	<b>53544.623</b>

\*При



**IR-40/48/60/80/100**

---